

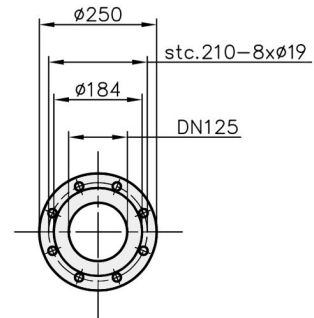


LS5 Verticale leiwielpompen Vertical diffuser pumps

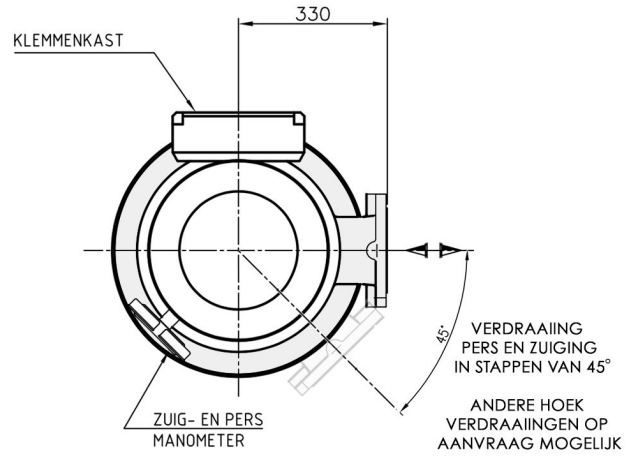

Dimensions

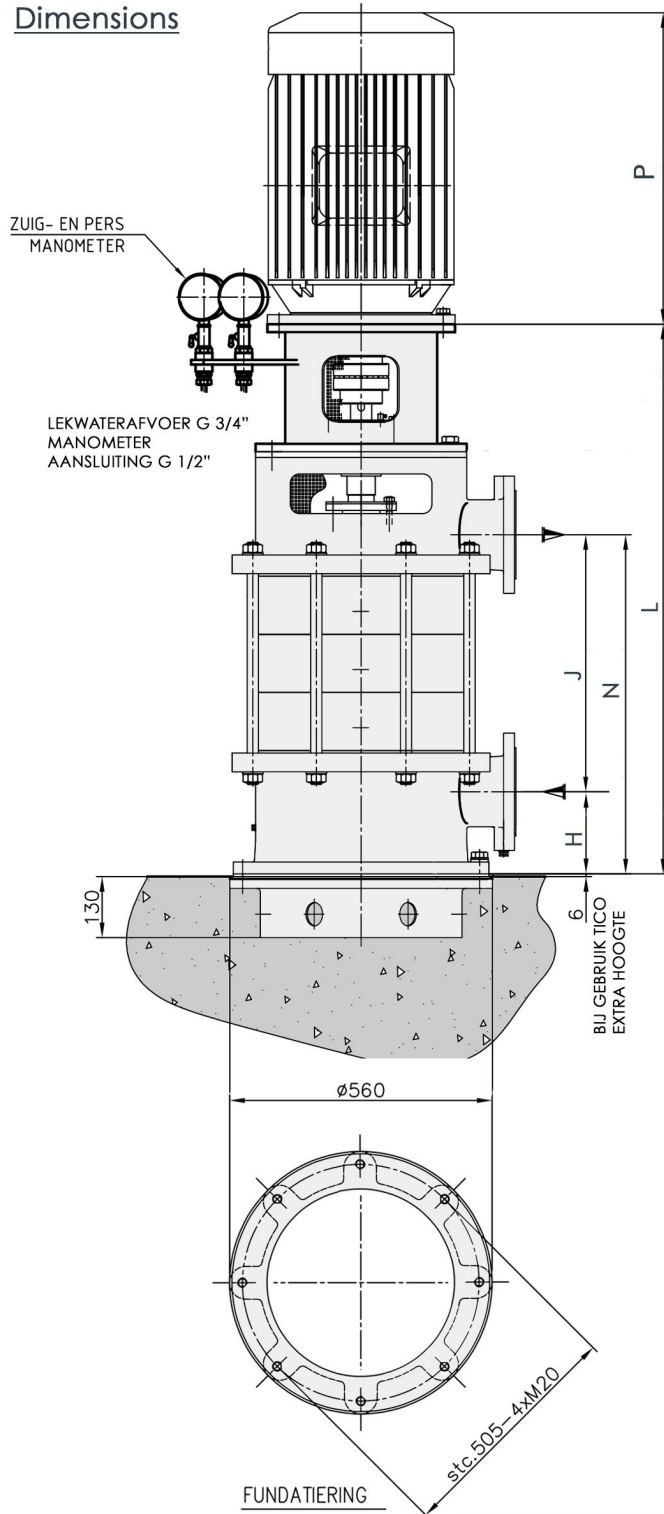

ZUIG- EN PERS FLENS DN125
EN1092-2 PN16 (GELIJK AAN PN10)

IEC	Vermogen Kw	Hoogte P
160L	15	566
180M	18,5	592
180L	22	592
200L	30	657
225S/M	37	746
225S/M	45	746
250S/M	55	746
280S/M	75	931
280S/M	90	931
280S/M	110	931

Aantal Trappen	H	J	N	L<=30 Kw motor	L>30 Kw motor
1	175	176	351	800	830
2	175	300	475	924	954
3	175	424	599	1048	1078
4	175	548	723	1172	1202
5	175	672	847	1296	1326
6	175	796	971	1420	1450
7	175	920	1095	1544	1574

LETOP! BIJ 1 TRAP KAN PERS EN ZUIG NIET BOVEN ELKAAR

AFMETINGEN TER INFORMATIE
VOOR DEFINITIEVE AFMETINGEN
ZIE G.A. (GENERAL ARRANGEMENT)